



Cut protection

KRYTECH 840

High risk - ISO D



PROTECTION CONTRE LA COUPURE
NIVEAU D

EN 388



3X43D

EN 407



X2XXXX

ISO 13997
19.8 N (2018 g)

Dexterity EN ISO
21420: 5/5



0334

High protection for handling heavy or sharp objects in wet environments

SPECIFIC ADVANTAGES



Cut protection

- High cut protection for safety work



Thermal protection

- Good thermal insulation of the hand

Puncture protection

- Good puncture-resistance



Productivity

- Good grip for picking up parts safely, due to embossed texture



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Construction industry:
Construction Industry
(Carpenters/Joiners)
- Ceramic and plastics industry
- Glass industry
- Local Authorities: Local
Authorities (Waste Collection
and Processing)

APPLICATIONS

- Cutting wood
- Installing steel structures
- Post-injection handling of hot plastic parts
- Handling of composite materials after heat
processing
- Handling glass sheets
- Processing waste at a sorting center





Cut protection

KRYTECH 840

High risk - ISO D

LEGENDS

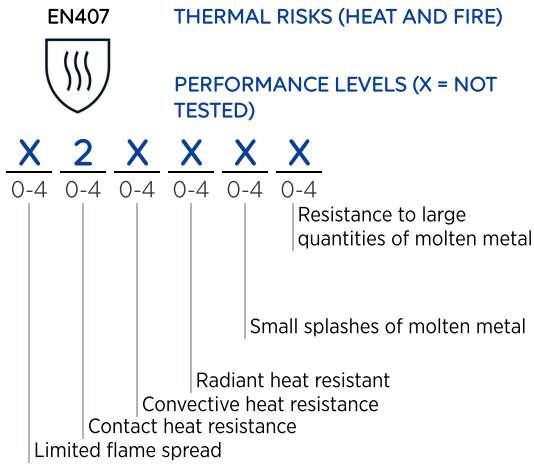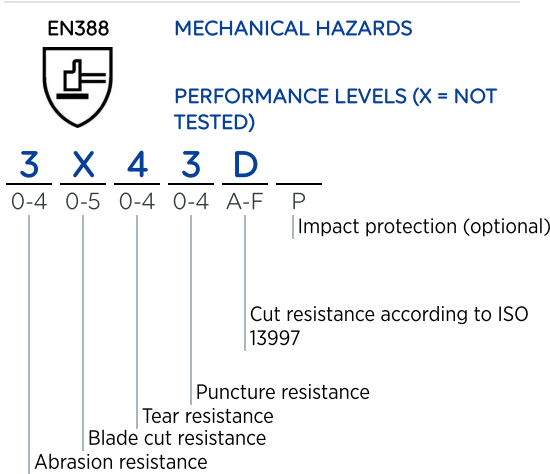

PRODUCT DETAILS

Interior finish	Seamless textile support from superior strength fibres
Gauge	10
Exterior finish	Embossed texture
Material	Natural latex
Cuff characteristic	Knitted Cuff
Colour.s	Grey, Blue
Length (cm)	23-26 cm
European sizes	7 8 9 10

LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/box 72 pairs/carton
-----------	---

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/01/19/0134
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE