

SUSTAINABLE EVER-LITE®

SAFETY REDEFINED, SUSTAINABILITY PERFECTED

Discover the perfect blend of comfort, protection, and sustainability with our Sustainable Ever-Lite® safety glasses. Designed with a soft nose piece for all-day wear, lightweight bio-based materials, and a scratch-resistant, UV-protective lens, they offer superior safety while minimizing environmental footprint.



EARTH
SHIELD




H2MAX



RUBBER
NOSE PIECE



CO-INJECTED
TEMPLES

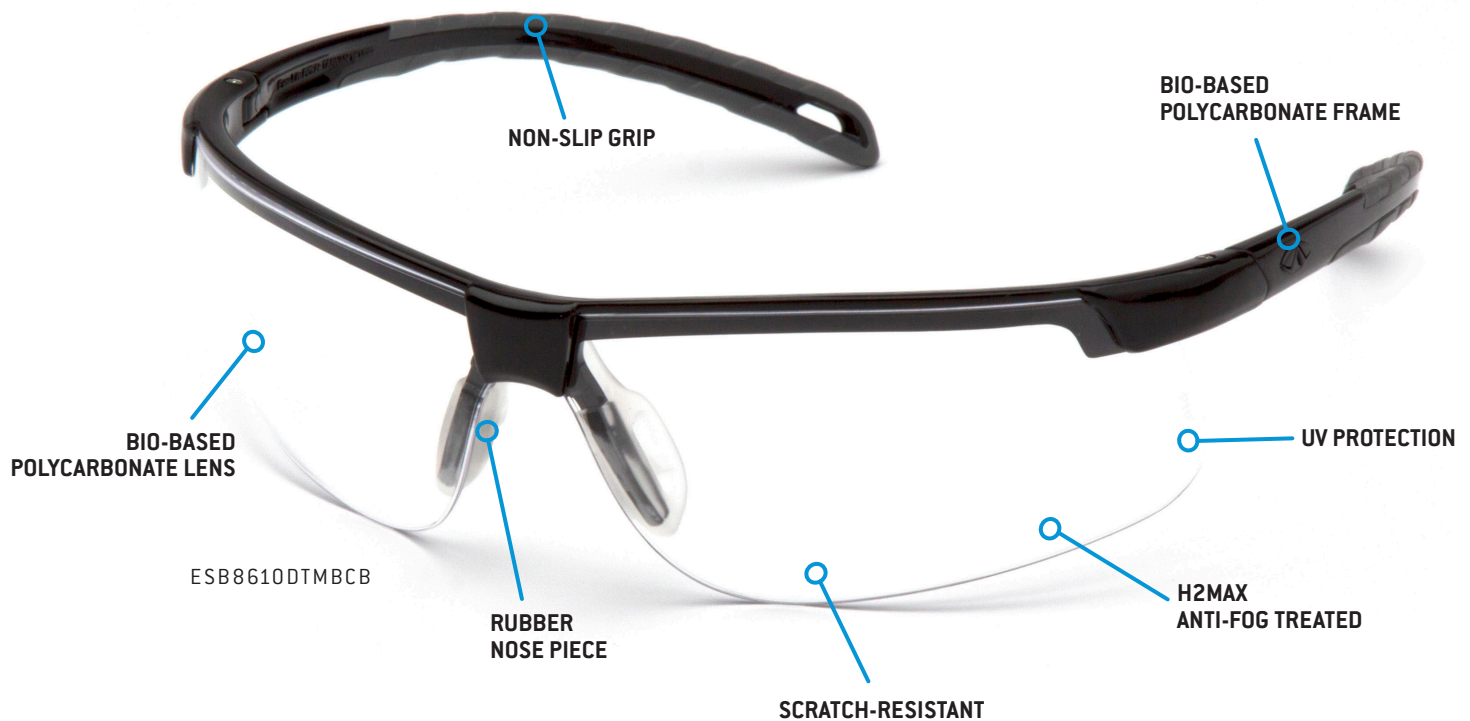

FEATURES

Eco Guard: Made with 90% bio-based polycarbonate, significantly reducing CO₂ emissions during production, and packaged in recyclable materials

All-Day Comfort: Designed with lightweight, half frames to provide a comfortable fit and clear vision the ideal balance between protection and aesthetics

Expanded Field of Vision: Wraparound polycarbonate lens is scratch-resistant, providing clear vision and UV protection against harmful rays

Stable Fit: Co-injected temple design and rubber nose piece enhance durability, stability and style while ensuring comfort during extended wear

Maximum Anti-Fog Clarity: The lens, treated with H2MAX, provides maximum clarity in extreme conditions while adding abrasion and chemical resistance, ensuring durable, waterproof vision even after repeated cleaning

Built Tough: Meets EN166 standard, CE & UKCA certified for eye and face protection devices



SCAN HERE
TO LEARN MORE

SUSTAINABLE EVER-LITE®

SAFETY REDEFINED, SUSTAINABILITY PERFECTED

Discover the perfect blend of comfort, protection, and sustainability with our Sustainable Ever-Lite® safety glasses. Designed with a soft nose piece for all-day wear, lightweight bio-based materials, and a scratch-resistant, UV-protective lens, they offer superior safety while minimizing environmental footprint.



EARTH SHIELD



H2MAX



RUBBER NOSE PIECE



CO-INJECTED TEMPLES

VARIATIONS



Black Frame

● ESB8610DTMBCB Clear H2MAX AF



Black Frame

● ESB8620DTMBCB Grey H2MAX AF

MATERIALS

Lens	Frame	Nose Piece	Hinge	Screw
Bio-based Polycarbonate	Bio-based Polycarbonate	Thermoplastic Rubber (TPR)	Bio-based Polycarbonate	Stainless Steel

MARKINGS

Part No.	Lens Marking	Temple Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
ESB8610DTMBCB	2C-1.2 P 1 F KN CE	CE P EN166 F	Code - field of use	Symbols	Weight: 22 gm
ESB8620DTMBCB	5-2.5 P 1 F KN CE	CE P EN166 F	2 or 3: UV filter 5 or 6: Solar filter Colour Perception C: Unimpaired colour perception Protection Class 1.2 - 6: Degree of visible light filtration Optical Class 1: High optical quality - no optical distortion Mechanical Strength F: Low energy impact, resists a 6 mm, .86 g at 45 m/s T: Impact protection at extreme temperature conditions Symbols P: Manufacturer's mark K: Resistance to surface damage by fine particles N: Filter with anti-fog CE: Certification of European Union	CE: Certification of European Union P: Manufacturer's mark EN166: CE specification for protective eyewear Mechanical Strength F: Medium energy impact, resists a 6 mm, .86 g at 45 m/s T: Impact protection at extreme temperature conditions	PD: 64 mm Bridge: 11.2 mm Lens base: 8 curve Lens size diagonal: 79.6 mm Lens size vertical: 43.3 mm Lens thickness: 1.8 mm Overall length (lens - tip): 163.5 mm Overall width (hinge - hinge): 134.3 mm Closest point between temple tips: 70 mm Closest point between lens: 11 mm

Product markings may vary // Updated as of 08.24